

Nexion interprets Stone

RUNA COLLECTION

Runa collection brings the essence of the noble and sophisticate character of the slates found in the countryside, villages and historical cities of Northern Europe. Stones that blend harmoniously with the elements of nature in a very contemporary style.

Though these stones are common in Europe, finding the nicest one is not easy. Nexion has worked to recreate the taste of those suggestive slates that blend naturally in the architectural works of contemporary urban contexts. By the perfection of design and the hands of skilled craftsmen, Nexion has given to the surface of Runa the character of the best natural stones, strong at sight and gentle at touch.

The result is a ceramic collection that returns the sober and harmonious elegance of slates with a modern and dynamic mood. A collection that brings the best of the inspiring Italian contemporary design to any type of ambience and location.

Nexion about

Nexion is a brand of Nexion Surfaces, a multinational ceramic company that is the result of a partnership between two large family groups that have always been leaders in their reference markets: Ceramiche Speranza, the best in its class Italian firm founded in 1961, that has setup the state of the art manufacturing facilities in India together with the Aghara family, one of the leading players in ceramics and sanitary ware in India since 1977.

With mastery of technology and design, we turn the best of the Italian tradition and lifestyle into contemporary ceramic surfaces that can be source of inspiration for architects and designers around the world.

Open-minded and keen to learn from customers and partners, we are committed to deliver the best quality and service and we believe that our work ends when our clients fulfill their desires and achieve their goals.

Headquarters & Indian Sales
Nexion Surfaces Private Limited
1104, Shapath V, S.G. Road
Ahmedabad, Gujarat (India)
indians@nexiontiles.com
www.nexiontiles.com

Design, Marketing & Global Sales
Via 2 Giugno, 13
41042 Fiorano Modenese
Modena (Italy)
globals@nexiontiles.com
www.nexiontiles.com



STONE | Runa

4 Inspirations


elegant and suggestive colours interpreting the Runa stones.

5 Sizes


different sizes suited to the most diverse design requirements.

120x240 cm | 80x160 cm | 60x120 cm | 60x60 cm | 30x60 cm


Full body-colored porcelain stoneware (International standard) | Vitrified stoneware (Indian standard) Rectified | 9 mm thickness

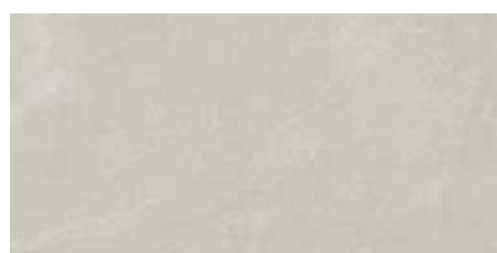

120x240 cm
F14RNAGONRO Grigio Chiaro

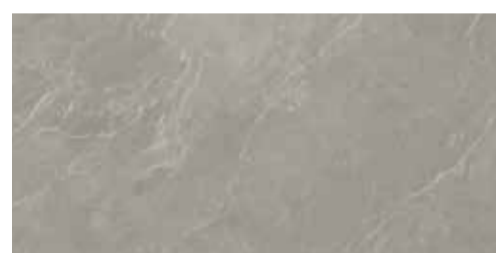

120x240 cm
F14RNAGINRO Grigio Scuro



80x160 cm
F86RNCGNRO Grigio Chiaro



80x160 cm
F86RNCGINRO Grigio Scuro



60x120 cm
F62RNAGONRO Grigio Chiaro



60x120 cm
F62RNAGINRO Grigio Scuro



60x60 cm
F60RNCGNRO Grigio Chiaro



60x60 cm
F60RNCGINRO Grigio Scuro




30x60 cm
F63RNAGONRO Grigio Chiaro



30x60 cm
F63RNAGINRO Grigio Scuro

Surface pattern options

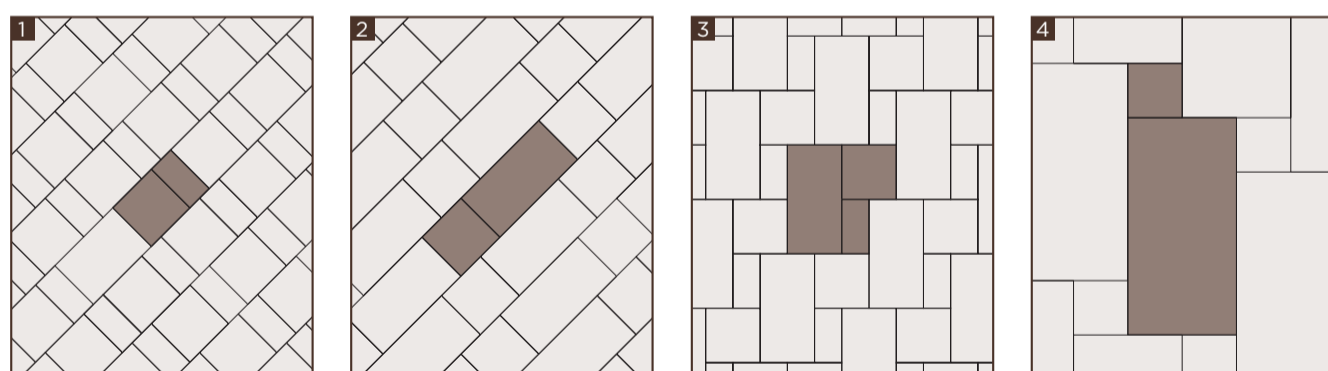

60x60	66,7%	60x120	66,7%	60x120	57,1%	120x240	88,9%
30x60	33,3%	60x60	33,3%	60x60	28,6%	60x60	11,1%
		30x60		30x60	14,3%		



120x240 cm
F14RNABONRO Beige



120x240 cm
F14RNANONRO Nero



80x160 cm
F86RNCBONRO Beige



80x160 cm
F86RNCNONRO Nero



60x120 cm
F62RNABONRO Beige



60x120 cm
F62RNANONRO Nero



60x60 cm
F60RNCBONRO Beige



60x60 cm
F60RNCNONRO Nero



30x60 cm
F63RNABONRO Beige



30x60 cm
F63RNANONRO Nero

Nexion installation suggestions

Nexion recommends 2 mm joint for optimal aesthetics taking advantage of the tiles caliber in multi-sized applications.

Both cement and epoxy grout can be used; grout-design color matching advisable for optimal aesthetics.

It is not recommended to use grouting with colored pigments in contrast with the color of the tiles.

For detailed installation guidelines log on www.nexiontiles.com

Nexion quality standards

ALL TESTS ARE CARRIED OUT BY ITALIAN LABORATORIES ACCREDITED ACCORDING TO ISO/IEC 17025:2017

Standards according to ISO 13006: Annex G - EN 14411: Annex G. Dry - Pressed Ceramic Tiles.

QUALITY ITEMS	TECHNICAL FEATURE	STANDARD METHOD ISO	UNIT	REQUIREMENTS ISO 13006:2018(E) Ev. -0,5% GROUP B1a	NEXION Values	
					SIZE < 1200 mm (SLABS)	SIZE > 1200 mm (SLABS)
					%	mm
DIMENSIONS AND SURFACE QUALITY	Width	ISO 10545 - 2	mm	+ 0,3%	+ 0,1%	± 0,8 mm
	Length	ISO 10545 - 2	mm	+ 0,3%	+ 0,1%	± 0,8 mm
	Thickness	ISO 10545 - 2	mm	+ 5,0%	+ 4%	± 0,5 mm
	Straightness of Side	ISO 10545 - 2	mm	+ 0,3%	+ 0,1%	± 0,8 mm
	Rectangularity	ISO 10545 - 2	mm	+ 0,3%	+ 0,1%	± 1,3 mm
	Surface Flatness	ISO 10545 - 2	mm	+ 0,4%	+ 0,1%	± 1,8 mm
	Surface Quality	ISO 10545 - 2	-	A minimum of 95% of the tiles are to be free from visible defects which can impair the appearance of a major area of tiles.	95%	
	PHYSICAL PROPERTIES	Water Absorption	ISO 10545 - 3	%	≤ 0,5% Individual 0,6%	Avg. ± 0,08% Individual 0,2%
Modulus of Rupture		ISO 10545 - 4	N/mm ²	Min. 35, Individual Min. 32	Min. 42	
Breaking Strength		ISO 10545 - 4	N	Not less than 1300	Min. 1800	
Moisture Expansion		ISO 10545 - 10	mm/m	-	0,02	
Surface Abrasion		ISO 10545-7	Class	Minimum Class -II Report abrasion class and cycles passed	Class IV (> 2100 Cycles)	
Resistance to surface abrasion of glazed tiles intended for use on floors						
Mohs Hardness of surface		NA	-	-	7	
Coefficient of linear thermal expansion from ambient temperature to 100 °C		ISO 10545 - 8	K ⁻¹	As declared by the Manufacturer	6x10 ⁻⁴ K ⁻¹ max	
Thermal Shock Resistance		ISO 10545 - 9	-	As declared by the Manufacturer	No damage	
Crazing Resistance: glazed tiles		ISO 10545 - 11	-	Required	No damage for Min. 10 Cycles	
Bulk Density		ISO 10545 - 3	g/cc	2,2	2,2	
Impact Resistance		ISO 10545 - 5	-	As declared by the Manufacturer	0,55	
Frost Resistance		ISO 10545 - 12	-	As declared by the Manufacturer	No change	
Slip Resistance	ANSI A1371 DIN 51130	-	As declared by the Manufacturer	DCOF > 0,51 R-10		
Small color differences	ISO 10545 - 16	-	Plain colored tiles only where required GL: AE < 0,75 UGL: AE < 1,0	No change		
CHEMICAL PROPERTIES	Resistance to staining	ISO 10545 - 14	Class	Minimum Class 3	Class 4	
	Resistance to household chemicals and swimming pool salts	ISO 10545 - 13	Class	Minimum B	Minimum A	
	Resistance to acids & alkalis	ISO 10545 - 13	Class	As declared by the Manufacturer	Minimum B	

Packaging info

Shipments to domestic markets (India)

Nominal Size cm	Thickness mm	Pcs. x box	Sq. mt x box	Weight x box (Kg)
120x240	9	1	2,87	61,00
80x160	9	2	2,55	54,00
60x120	9	2	1,43	30,00
60x60	9	4	1,43	31,00
30x60	9	6	1,07	23,00

Size

Nominal Size cm	Actual Size cm
120x240	119,8x239,8
80x160	79,8x159,8
60x120	59,8x119,8
60x60	59,8x59,8
30x60	29,8x59,8

Worldwide shipments

Nominal Size cm	Thickness mm	Pcs. x box	Sq. mt x box	Weight x box (Kg)	Box x pallet	Sq. mt x pallet	Pallet weight (Kg)
120x240	9	1	2,87	61,00	37	106,30	2347,00
80x160	9	2	2,55	54,00	28	71,40	1582,00
60x120	9	2	1,43	30,00	32	45,82	1003,00
60x60	9	4	1,43	31,00	34	48,69	1077,00
30x60	9	6	1,07	23,00	40	42,72	943,00

Tiles are packaged in a random manner and company cannot guarantee the type of faces inside each package.



